




#### Quality

- / Subjected to test electroluminescence
- / IP65 + 1 m cable
- / High transmissivity glass and high resistance
- / Frame with higher mechanical strength and air chamber
- / Friendly environment & recyclable materials

#### Certificates

- / IEC 61215:2005
- / IEC 61730-1:2004 / IEC 61730-2:2004
- / Frontal load (snow) 5.400 Pa
- / Back load (wind) 2.400 Pa
- / Fire Resistance Certificate / Class I (under standard UNI 9177)
- / MCS (UK)
- / EE016-20130528-001 (France)
- / WEEE compliance in Germany
- / ETL Listed Mark (USA)
- / PID resistant

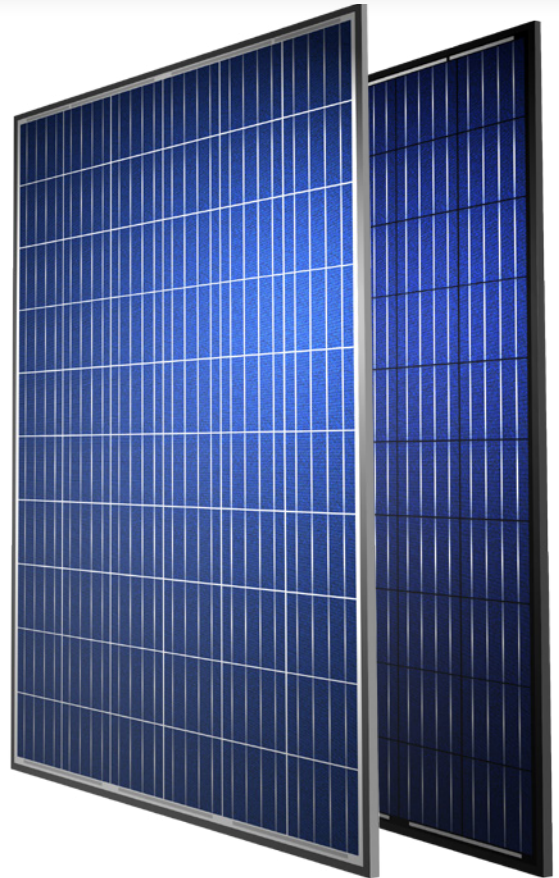

Extra power  
extra up to 3%  
extra up to 7W

PHOTON Laboratory talks about our modules:

*"Eurener is one of the oldest module manufacturers in Europe: the Spanish company was founded in 1997. [...] Is distinguished by having values that are over the average: the temperature coefficient is quite better than other modules that are in the test field. The curve behavior at different irradiance conditions shows a marked efficiency increase in radiations from medium to high, and a slight drop in efficiency at low irradiance conditions. These factors show that this module could reach higher performance than the average in long-term measurements".*



## PEPV - Polycrystalline

Standard - All Black / 260 / 265 / 270 / 280W



20 years of experience  
15 years warranty product





### Technical features

Frame
Silver anodized aluminium 0,015 mm
Robust and resistant to corrosion
Built-in plug
Connection box
Sealed, robust and wide for heat dissipation
IP65 according to IEC 60529
Diodes by-pass built-in (3) for protection of the partial shading
Connector MC4 or compatible, easy and rapid connection
Cables 1 meter length and 4mm <sup>2</sup> section
Reaction to Fire Class I (conformity to UNI 9177 norm)
Frontal
3,2 mm tempered glass
Textured, extra-clear with low iron content
Solar cells
60 cells polycrystalline silicon / 156x156 mm
Weight and dimensions (L x W) +/-1% mm
20 Kg   1640/50 x 992 x 35/40 mm

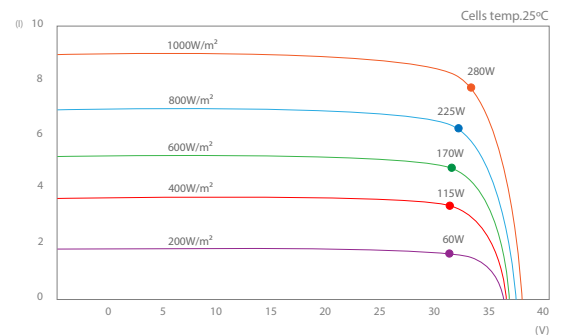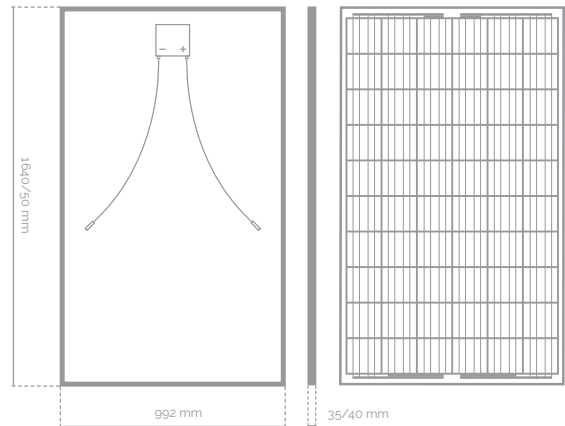

### Electric data

Standard - All Black	PEPV 260	PEPV 265	PEPV 270	PEPV 280
Nominal power, P <sub>mp</sub>	260 W	265 W	270 W	280 W
Tolerance, P <sub>mp</sub>	0 / +3%	0 / +3%	0 / +3%	0 / +3%
Area of the module	1,62			
Module efficiency	16,05%	16,36%	16,67%	17,28%
I <sub>sc</sub>	8,82 A	8,98 A	9,12 A	9,25 A
U <sub>oc</sub>	38,10 V	38,40 V	39,22 V	39,10 V
I <sub>mp</sub>	8,47 A	8,56 A	8,61 A	8,85 A
U <sub>mp</sub>	30,70 V	30,96 V	31,36 V	31,65 V
Maximum voltage	1000 V			
α I <sub>sc</sub>	0,039% / °C			
β U <sub>oc</sub>	- 0,29% / °C			
γ P <sub>max</sub>	- 0,42% / °C			
Temperature range	- 40°C to +85°C			
NOCT	44°C ± 2°C			

NOTE: Read the instruction manual of this product and follow the indications. Values are valid for: 1000W/m<sup>2</sup>, AM 1,5 and cell's temperature of 25°C. All the information of this brochure may be amended without notice by Eurener.

Sales Office:  
Av. Marqués de Sotelo, 1-4<sup>a</sup>  
46002 Valencia (Spain)

Tel. +34 96 004 55 15  
contact@eurenergroupp.com

